


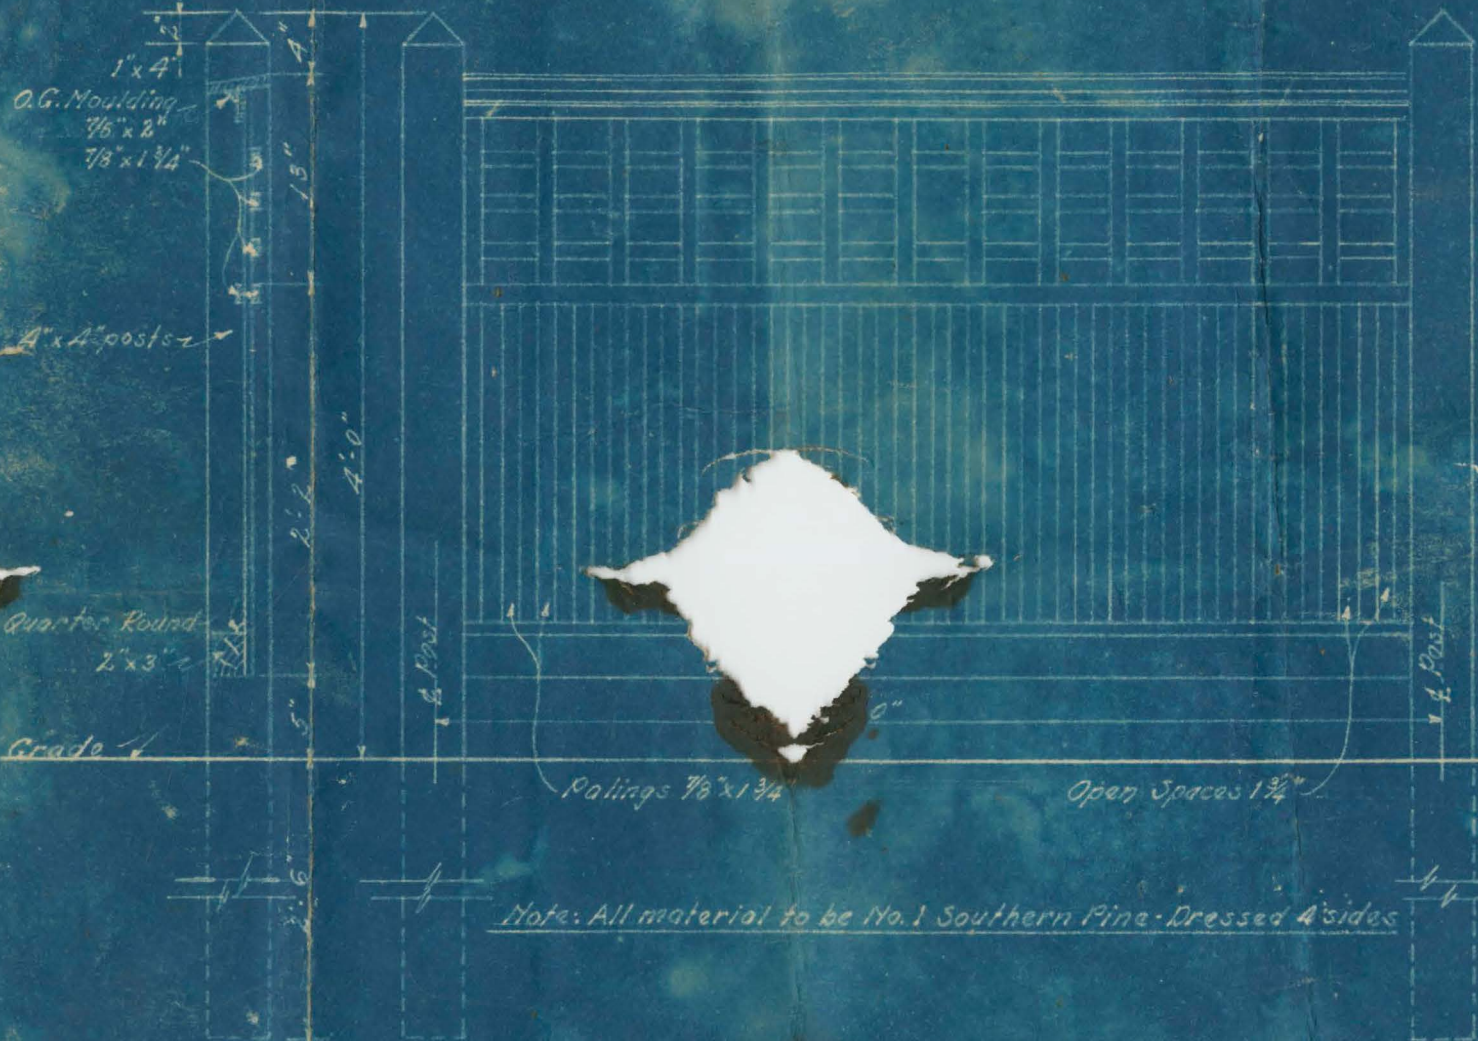

SECTION

ELEVATION

DETAIL ORNAMENTAL WOOD FENCE

3-2 X 7-0 7-4 7-2

5.
2-2
1-1
4
4-0

MOUNT AIRY, N. C.

Owner *Mr. Shaffer* Address *914 Mt. Airy - 92c* Phone _____ Location _____
 Architect _____ Address _____ Phone _____
 Description _____ Size _____ Sq. Ft. House _____ Sq. Ft. Porch _____

ESTIMATE SHEET

ARCHITECTURAL-			ROOF-		
Plans & Specifications			Wood Shingles		
PRELIMINARY-			20 1/2 Composition Shingles	7 36	163 75
Building Permit	3 00		1 1/2 Asbestos	BUILT UP " ROOF	87 00
Water for Construction	10 00		Flashing & Valleys		
Wrecking			Mis.		
EXCAVATING-			FRAMES & DOORS-	800	400 00
Yds. of Excavating	100 00		Doors Complete		
Grading & Filling			Graage Doors Com.	800	400 00
Hauling			Windows "		
CONCRETE-			Ventilators		
Cu. Yds in Footing			Window Blinds		
35 Cu. Yds. in Wall	100 350 00		Screens		130 00
Sq. Yds. in Floors			PLASTERING-		
Sq. Yds in Walks			Yds. Stucco		
Sq. Yds. in Steps			1640 Yds. Sand finish		1148 00
Reinforcing Steel			Yds. White "		
Misc.			Keen cement		
MASONRY-			FLOORING & CEILING-		
120 00 Com. Brick	25 00 300 00		Ft. 1st. Grade Oak		
28 000 Face Brick	30 00 840 00		Ft. 2nd. " "	500	266 60
Chimney Brick			5332 Ft. 3rd. " "	500	54 00
Hollow Tile			1200 Ft. No. 1 Pine floor	480	24 60
Stone Work			800 Ft. No. 2 " BASMENT	300	36 00
4 Brick Mantels	160 00		1200 Ft. No. 1 Ceiling	300	
Built in Grates			Ft. No. 2 "		
FLUE LINING-			MISCELLANEOUS-		
Ft. 8 x 8			1200 Lin. ft. Base & Shoe	600	72 00
Ft. 8 x 12			Lin. ft. Picture mold		
200 ft. 12 x 12	100 00		4 Kitchen Cabinet		200 00
FRAMING-			4 Medicine "		30 00
29 606 Rough framing	200 452 12		Breakfast Room Cab.		
Sub. flooring			Bath " "		
14 000 Storm Sheathing	280 00		7 Ironing Board		30 00
Roof Sheathing			Book Case	INSIDE FINISH L.	100 00
FINISH LUMBER-			Wood Mantle		
Feet Weather Boarding			Shelves & Rods in Closets		
Feet German Siding			Stair Material		250 00
Corner Boards			Outside Steps		
3-4 x 4 1-2 finish boards			Sanding Floors & Trim		100 00
3-4 x 5 1-2 finish boards			Building Paper		15 00
3-4 x 7 1-2 finish boards			Removing Debris		20 00
3-4 x 9 1-2 finish boards			GLAZING-		
3-4 x 11 1-2 finish boards			Mis. Glass		
2 Inch Crown mold			Plate "		
3 Inch Crown mold			Mirrors		
4 Inch Crown mold			Weather Strips		
5 Inch Crown mold			HARDWARE-		
Quarter Round			Rough Hardware		60 00
Mis. mold			Finish Hardware		
8 Porch Col.	70 00		Mis. Hardware		
Lin. ft. Porch rack			CARPENTER LABOR		1352 30
Lin. ft. " Baluster	65 00		COPPER WORK		
Lin. ft. Eave cornice	125 00		PAINTING		400 00
Ft. 2 " Forest pine			ELECTRICAL		
METAL WORK-			WIRING		
Structural steel	60 00		FIXTURES		
Sheet Metal			PLUMBING		
Ornamental Iron			HEATING		
Coal Chute			LIABILITY INSURANCE		55 17
Clean out Door	5 00		BOND		
Steel Sash			OVERHEAD		621 26
324 Lin. ft. Gutter	64 80		EXTRAS		
TILE WORK			TOTAL COST		8960 00
			PROFIT		
			COMPLETE BID		

STATEMENT

MOUNT AIRY, N. C.

March 18 1935

M.

Welch Est

work on front wall & stairs

IN ACCOUNT WITH

MATT HENES

CONTRACTOR AND BUILDER

480 NORTH MAIN STREET

TELEPHONE 570

Tearing down & clearing 18000 Brick	72 00
16300 Face Brick @ 3.50	221 50
Taper cement & lime on 18400 brick	193 50
8 windows @ 11.25	90 00
5 Key stone	7 50
140 Face brick @ 8.00	1120
cutting brick to radii	5 00
48 ft paper @ 25	12 00
Building stairs framing & push 2	23 00
24 stair treads oak	40 25
15 " " " " " "	7 50
Tape on stairs	35 00
140 yd Plastering on rock & tuff	86 00
Material for closing old stairs	5 00
concrete base for stairs	4 00
Steel for front wall	211 00
Painting, Repairing roof	25 00
Nails	3 55
composition insurance	12 30
Water	7 50
5% com	107 3 90
	53 25
	1126 65